


### SPECIFICATIONS

#### General Information

- 0-20kw Supported IT Load
- 1737 CFM at 0.1" Static Pressure
- Fail Safe Operation for 100% opening in 15 seconds or less
- Zero Maintenance
- 20 Gauge Steel Construction
- Powder Coat Finish
- Four Temperature Control Points
- Six Vane Automatic Damper Design
- Damper Control Infinitely Variable 0-100%
- User adjustable set point for control
- Tool less roll form stringer attachment
- 23.1"x26.7"x6.2" for use in >12" FFH

### REQUIRED COMPONENTS

- DirectAire™
- 4 or 16 unit AC Power Supply
- Concore Bolted Stringer System

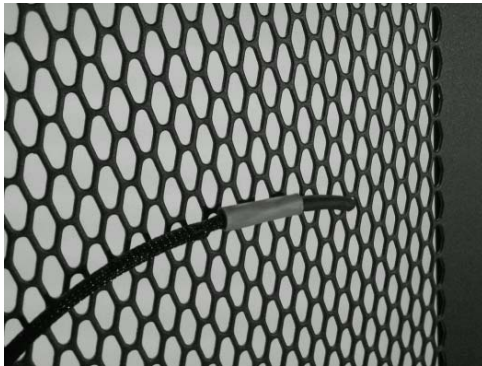

Rack mounted probes to ensure accurate supply temperature



User set point control, display for peak temperature at rack



Heavy Duty Gear Driven Damper Control for high reliability

DirectAire™ paired with SmartAire™							
Percent Open	0%	17%	33%	50%	67%	83%	100%
Measured Flow (CFM) 0.05"	301	318	406	681	1050	1328	1487
Measured Flow (CFM) 0.10"	445	485	590	884	1274	1550	1737
Measured Flow (CFM) 0.15"	483	485	657	1034	1555	1952	2157
Measured Flow (CFM) 0.20"	567	576	767	1101	1807	2285	2581